




1089

ALUMI-BRITE

SPECIALTIES FOR MAINTENANCE AND SANITATION SINCE 1947

CLEANS & BRIGHTENS IN "ONE OPERATION"

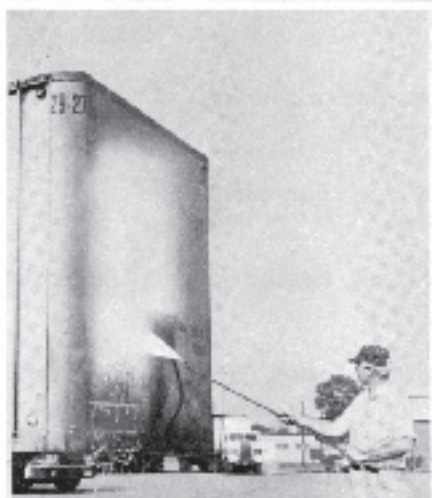

Clean and brighten trailers with regular wash rack personnel in no more time than it takes to achieve the ordinary soil wash. Buffered acidity minimizes the possibility of damage to painted portions, signs or decals.

NEW DOUBLE STRENGTH

FAST ACTING CHEMICAL ACTION—1089 Alumi-Brite penetrates and removes those tough, stubborn, corrosive road and oxidation films, even diesel smoke. Apply Hot or Cold, manually or with spray equipment. Can be diluted up to 80 to 1 with hot water.

- **FAST**
- **ECONOMICAL**
- **EFFECTIVE**

**DOES NOT CONTAIN
HYDROFLUORIC ACID.**

SLASHES BRIGHTENING COST

Packaged in 55 Gallon Drums

Rev. 7-15-15

Toll Free: 800-238-5150
Local: 901-363-4340
Fax: 901-375-3600

Delta Foremost Chemical Corp.
3915 AIR PARK ST. • P.O. BOX 30310 • MEMPHIS, TENNESSEE 38130-310

Visit our Web Site at:
www.deltaforemost.com





TECHNICAL DATA

FOREMOST 1089 ALUMI-BRITE

Rev. 7-15-15

DESCRIPTION: A highly concentrated solution of acid with selected additives and detergent, which is non-flammable and emits no toxic odors. It is completely soluble in water, rinses thoroughly leaving no streaks or residue. It has been especially formulated for heavy duty cleaning and removal of oxidation deposits from aluminum and other surfaces.

APPLICATION: Recommended for cleaning and removal of road and oxide films and deposits from aluminum surfaces such as trailers and similar surfaces. When used as directed, diluted solutions will not harm aluminum, painted surfaces, signs or decals.

DIRECTIONS:

1. Dilute one part of concentrate with 40 to 80 parts water for heavy cleaning.
2. Apply solution to surface to be cleaned by spraying or brushing.
3. Work from bottom surfaces up, one area at a time.
4. Allow the solution to remain on the surface approximately 3 to 15 minutes, then flush off with clean water.

NOTE: Do not allow concentrate or use solutions to contact glass. Heated solutions increase the speed and effectiveness of Alumi-Brite.

PRECAUTIONS: **KEEP OUT OF REACH OF CHILDREN.** May be harmful or fatal if swallowed. CONTAINS Hydrochloric Acid, Sulfuric Acid, Ethylene Glycol Monobutyl Ether and Fluorides. Causes severe eye and skin burns. Do not get in eyes, on skin, or clothing. Causes severe respiratory tract irritation. Do not breathe vapors. Vapor extremely irritating. Use with adequate ventilation. Do not take internally. When handling always wear chemical splash goggles, face shield, rubber gloves and protective clothing.

FIRST AID: EYES AND SKIN: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes under shower. Get medical attention immediately. **INGESTION:** If conscious, give large amounts of lime water or milk of magnesia or water. Get medical attention immediately. **INHALATION:** If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Before using this product, read the Safety Data Sheet (SDS) for more detailed information regarding safe handling.

FACTS

1. Fast
2. Economical
3. Simple to use

BENEFITS

1. Speedy penetration of stubborn deposits
2. Can be diluted up to 80 to 1
3. No special equipment needed