




FM 1338-ES **METAL GUARD** AEROSOL

SPECIALTIES FOR MAINTENANCE AND SANITATION SINCE 1947



Easy Aerosol Application

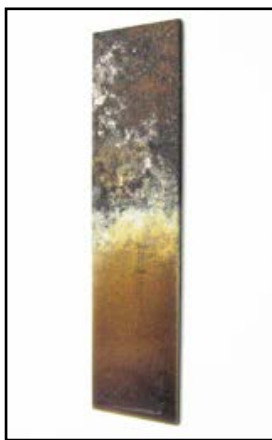

**Treated Metal in
Corrosive Environment**



**Treatment Removed
After 6 Months**



INDOOR/OUTDOOR RUST AND CORROSION PROTECTION

FOREMOST 1338-ES METAL GUARD is an outstanding water displacing, non-staining rust preventative which rapidly separates water from metal surfaces after machining operations or after alkaline cleaning. Conforms to Military Specifications MIL-C-16173D CORROSION PREVENTIVES.

CONVENIENCE—Complete metal protection in a handy aerosol package. Translucent coating allows serial numbers, part numbers, etc. to be seen without removal of the coating. Dry film allows parts handling with no sticky mess.

VERSATILE—In addition to rust and corrosion protection applied over rusty surfaces, FM 1338-ES Metal Guard aids in subsequent removal of rust.

DURABLE—FM 1338-ES Metal Guard will not crack, split, or flake under the most extreme conditions of expansion and contraction.

VERY FAST RESULTS—Metal Guard dries in 20 minutes or less. Sets up completely in 2 hours. When dry, treated objects may be handled without damaging the protective film.

RECOMMENDED FOR—

- Maintenance Departments
- Marine Accounts
- Valve & Motor Rebuilders
- Automotive Machine Shops
- Drilling Equipment
- Fleet Equipment
- Road Departments
- Equipment Rental
- Metal Parts Manufacturers

***Related bulk products are available for spray or immersion with varied drying times.**

***Treated surfaces may be painted without removing METAL GUARD, provided long-term paint adhesion is not critical.**

Packed In Aerosol Cans - 15 oz. net

16 Doz. or	8 Doz. or	4 Doz. or
4/48 cases	2/48 cases	1/48 cases

Rev. 5-29-13

Toll Free: 800-238-5150
Local: 901-363-4340
Fax: 901-375-3600

Delta Foremost Chemical Corp.
3915 AIR PARK ST. • P.O. BOX 30310 • MEMPHIS, TENNESSEE 38130-310

Visit our Web Site at:
www.deltaforemost.com





TECHNICAL DATA

FOREMOST 1338 METAL GUARD

Rev. 3-9-17

DESCRIPTION: An excellent corrosion inhibiting formula that seals out moisture, and will NOT peel off with age. Will even protect against salt spray, rust and corrosion. Contains a unique amber flex dust that will expand and contract with all metal surfaces uniformly to prevent cracking and peeling. Provides indoor and outdoor protection. Use on ferrous and non-ferrous metals.

APPLICATION: Recommended for use on all exposed metal parts, bearings, cables, chains, housings, jigs, precisioned machined surfaces, stampings and more.

Conforms to Military Specifications MIL-C-16173D CORROSION PREVENTIVES.

DIRECTIONS: Shake can well before using. Clean surface to bare metal. Spray even coat over entire surface. If needed, second coat may be applied in 5 minutes. Coating will set up in 2 to 3 hours.

PRECAUTIONS: **KEEP OUT OF REACH OF CHILDREN. DANGER:** Do not spray near heat, sparks or open flame. If swallowed, do not induce vomiting. CALL A PHYSICIAN IMMEDIATELY. Use with adequate ventilation. Avoid breathing spray mist and vapor. Deliberately concentrating and inhaling the vapor of the contents may be harmful or fatal. Do not puncture or incinerate container. Do not store at temperatures above 120°F. Do not place near source of heat, radiator or in direct sunlight. High temperatures may cause the container to burst. If sprayed in eyes, flush thoroughly with water for 15 minutes. Get medical attention.

Before using this product read the Safety Data Sheet (SDS) for more detailed information regarding safe handling.