




# 550 STRIP-SPRAY

SPECIALTIES FOR MAINTENANCE AND SANITATION SINCE 1947

Before

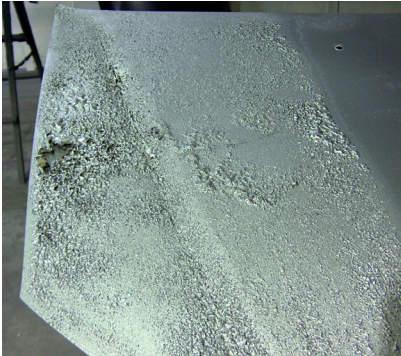

After



Peelers

Before



After



Decals

Before



After



Industrial

## MULTI-USE AEROSOL STRIPPER

**FAST**—Solvent based aerosol rapidly penetrates and blisters paint. Strips “peelers” in minutes.

**CONVENIENT**—Handy aerosol dispenser provides easy uniform application.

**SAFE ON**—on masonry, stone, wood, metal, glass, ceramics and plaster.

**EVAPORATES**—FM 550 evaporates quickly. Eliminates the handling of hazardous, messy residual gel.

**VERSATILE**—Strips paints, gaskets, adhesives and decals. Great for maintenance in booths as well as multiple automotive applications.

**PACKED —**

16 Doz. or  
4/48 cases

8 Doz. or  
2/48 cases

4 Doz. or  
1/48 case

Rev. 5-8-14

Toll Free: 800-238-5150  
Local: 901-363-4340  
Fax: 901-375-3600

**Delta Foremost Chemical Corp.**  
3915 AIR PARK ST. • P.O. BOX 30310 • MEMPHIS, TENNESSEE 38130-310

Visit our Web Site at:  
[www.deltaforemost.com](http://www.deltaforemost.com)





# TECHNICAL DATA

## FOREMOST 550 STRIP-SPRAY (Aerosol)

Rev. 6-27-16

**DESCRIPTION:** Foremost 550 Strip-Spray Aerosol is a fast acting paint stripper especially formulated for easy removal of defective (peeler) automotive topcoats. Strip-Spray offers fast, effective removal of single stage enamel topcoats with minimum risk of damage to factory primers when properly used. It is versatile, useful on most hard surfaces. Adheres to vertical surfaces. A strong, hard working, fast acting multi-purpose solvent.

**APPLICATION:** Foremost 550 Strip-Spray Aerosol is recommended for use in removal of defective (peelers) factory topcoat paints from domestic cars, vans and trucks. It is also ideal for removal of plasticized topcoats from bumpers and trim and removal of paint from frame rails and suspension components. Removes old paint, lacquers, enamels, varnish, shellac, acrylics and other coated finishes easily from plaster, masonry, stone, wood, metal, glass, ceramics, and other materials in a few minutes.

**DIRECTIONS:** **For Removal Of Defective Topcoats: (automotive uses)**

1. Shake can vigorously before each use.
2. Cover areas not being stripped with masking tape and paper.
3. Hold can 8-10 inches from the surface being stripped and apply an even medium coat of Foremost 550.
4. Let work for 1-5 minutes then remove by blowing off with compressed air or using a bondo spreader to push off or washing with water.
5. Follow paint manufacturers directions on prepaint preparation.
6. **Note:** Clean valve after every use by turning can upside down and press for short burst.
7. **For Best Results:** Do not apply to wet surface. Do not agitate or disturb stripper until peeler coat is loosened.

**For Non-Automotive Uses:**

1. Shake can vigorously before each use.
2. **For Best Results:** Clean off dirt, grease or heavy oil. Make certain surface is dry. **SHAKE WELL.** Hold can 8-10 inches from surface. Apply heavy coat evenly to entire surface. Allow stripping compound to remain until entire surface is blistered.
3. **Note:** Dissolving action will continue for several minutes after blisters appear. For heavily coated areas, allow stripping compound to remain for longer period. Remove with scraper, cloth or wash with water. Repeat if necessary after surface is dry. Clean valve after use by turning can upside down and press for short burst.
4. **Test In An Inconspicuous Area**

**WARNING:** Protect surrounding objects from overspray. Solvent will attack plastics, asphalt, tile and many synthetic materials. Do not allow scrapings or washings to contact food or live vegetation. Use of rubber gloves is advised if skin is subject to allergy or rash.

**PRECAUTIONS:** **KEEP OUT OF REACH OF CHILDREN. EXTREMELY FLAMMABLE.** May be fatal or cause blindness if swallowed. Vapor harmful. Contents under pressure. Contains methyl alcohol and methylene chloride. Cannot be made non-poisonous. Use only in a well ventilated area. Do not use near heat, sparks, or open flame. Avoid contact with eyes.

**FIRST AID:** Call physician immediately. In case of contact with eyes, flush thoroughly with water. If swallowed, call doctor, hospital emergency room, or Poison Control Center for instructions to induce vomiting. Do not use table salt solution. If available, use one tablespoon (½ oz.) of Ipecac syrup for persons one (1) year of age or older, plus at least one cup of water. Do not puncture or incinerate container. Do not expose to heat or store at temperatures above 120°F.

Before using this product, read the Safety Data Sheet (SDS) for more detailed information regarding safe handling.