




582

SAFETY SOLVENT II

SPECIALTIES FOR MAINTENANCE AND SANITATION SINCE 1947

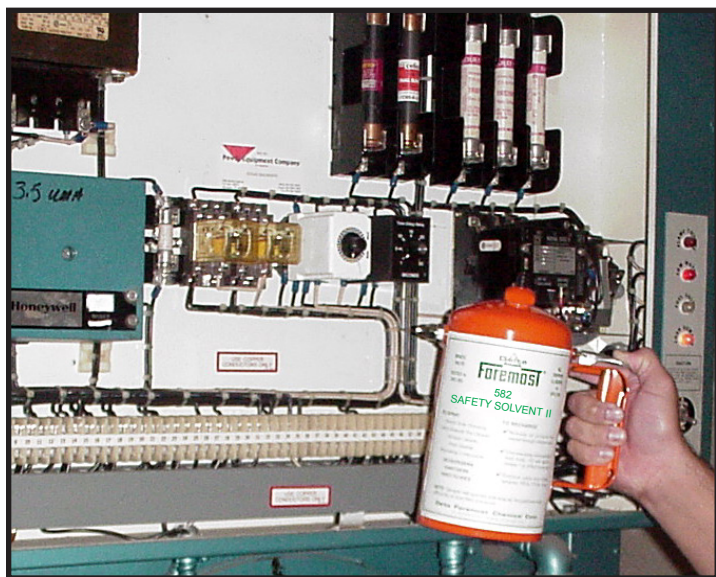

FAST—
SURE—
NO ARCING—

Does Not Contain
1,1,1-Trichloroethane, CFC's or
Other Ozone Depleting Chemicals

EXCELLENT CLEANING OF INDUSTRIAL EQUIPMENT

FAST—Quick penetrating solvents cut through soils, releasing them from the surface so they can be readily air blasted or flushed with reapplication.

LOW FLAMMABILITY—Safer than ozone depleting chemicals, extremely low flammability, exceedingly low toxicity, perfect for EPA conscious employers

VERSATILE—Can be used in spray operations and dip tanks for degreasing and cleaning metal parts.

ECONOMICAL—100% active material. Every drop you buy pays for itself in cleaning ability. No fillers added, not watered down. Light applications do heavy cleaning.

NOTE: Do not use on running electrical motors, automated electric process control monitoring systems, computers or data processing equipment. May affect some sensitive plastics and paints. Pre-test on inconspicuous areas before use.

CLEANS grease, grime, oils and waxes, from electrical equipment and other precision metal surfaces. No oxidation or rusting to recontaminate parts as with water-based cleaners.

UNEXCELLED FOR CLEANING —

- Industrial Equipment
- Control Panels, Coils, & Switches
- Drills, Lathes, and Presses
- Wrapping, Packing, and Sealing Machines
- Removing Protective (rust preventative) Coatings
- Diesel Electric Traction Motors

RECOMMENDED FOR—

Quick spot cleaning in soldering operations.

Packaged in 55 Gallon Drums

Rev. 9-20-13

Toll Free: 800-238-5150
Local: 901-363-4340
Fax: 901-375-3600

Delta Foremost Chemical Corp.
3915 AIR PARK ST. • P.O. BOX 30310 • MEMPHIS, TENNESSEE 38130-310

Visit our Web Site at:
www.deltaforemost.com



TECHNICAL DATA

FOREMOST 582 SAFETY SOLVENT II

Rev. 9-7-17

- DESCRIPTION:** Foremost 582 Safety Solvent II is neutral, non-conductive. Contains no 1,1,1- Trichloroethane, CFCs or other ozone depleting chemicals.
- A versatile, cold, safety solvent developed especially to replace the use of flammable solvents and to be consistent with the requirements of safety and insurance departments. This formulation rapidly and effectively removes oil, dirt, grease, grime, wax, lint, carbon dust, metallic particles and gum from all metal surfaces and other areas specified in directions. It exhibits no true flash point.
- This water-white and non-corrosive solvent dries quickly but not too fast to clean effectively. Treatment with it leaves no oily residue to impair paint adhesion or damage motors or other electrical equipment, and is safe for all metals, wood surfaces, sound paint and insulating varnish.
- APPLICATION:** Designed for maintenance of equipment such as industrial motors, switches, control panels, rheostats, stationary machinery, etc... Also, safely removes wax accumulations from bakery equipment and solvent base waxes from dyes and molds without leaving undesirable residual films and odors.
- DIRECTIONS:**
- General Cleaning:**
1. Spray Foremost 582 Safety Solvent II on the surfaces using a heavy wet pattern. A second application may be necessary for the more stubborn soils.
 2. Flush rinse with a second application.
 3. Dry off by air blast, wiping or allow to air dry.
- Vat Cleaning:**
1. Fill the vat with Foremost 582 Safety Solvent II.
 2. Immerse articles to be cleaned in the cleaner.
 3. Let soak for a few minutes.
 4. Remove the articles from the vat and dry by means of an air blast or allow to air dry.
- Always keep vat covered when not in use to prevent excessive evaporation.
- NOTE:** Do not use on running electrical motors, automated electric process control monitoring systems, computers or data processing equipment. May affect some sensitive plastics and paints. Pre-test on inconspicuous areas before use. Contains no 1,1,1-Trichloroethane, CFCs or other ozone depleting chemicals.
- PRECAUTIONS:** **KEEP OUT OF REACH OF CHILDREN.** Contains chlorinated and aliphatic solvent. Do not take internally. **MAY BE HARMFUL OR FATAL IF SWALLOWED.** Vapor is harmful. Keep away from heat and open flame. Use with adequate ventilation. Avoid breathing of vapor or spray mist. Avoid contact with skin and eyes. If ingested, get immediate medical attention. Keep container closed when not in use. Contact with skin can cause moderate irritation, defatting, dermatitis.
- FIRST AID: EYES:** Flush with large amounts of water, lifting upper and lower lids occasionally. Get medical attention. **SKIN:** Wash thoroughly with soap or mild detergent and water. **INGESTION:** Get immediate medical attention. **INHALATION:** If affected, remove individual to fresh air. If breathing is difficult, administer oxygen. If breathing has stopped, give artificial respiration. Keep person warm, quiet, and get medical attention.
- Before using this product, read the Safety Data Sheet (SDS) for more detailed information regarding safe handling.