


APPROXIMATE DILUTIONS AT 40 PSI FOR WATER-THIN PRODUCTS (1.0 CP)			
Tip Color	Orifice Size	Ratio (per Eductor Flow)	
		1 GPM	3.5 GPM
No Tip	.187	3:1	3.5:1
Grey	.128	3:1	4:1
Black	.098	3:1	4:1
Beige	.070	4:1	8:1
Red	.052	5:1	14:1
White	.043	7:1	20:1
Blue	.040	8:1	24:1
Tan	.035	10:1	30:1
Green	.028	16:1	45:1
Orange	.025	20:1	56:1
Brown	.023	24:1	64:1
Yellow	.020	32:1	90:1
Aqua	.018	38:1	128:1
Purple	.014	64:1	180:1
Pink	.010	128:1	350:1

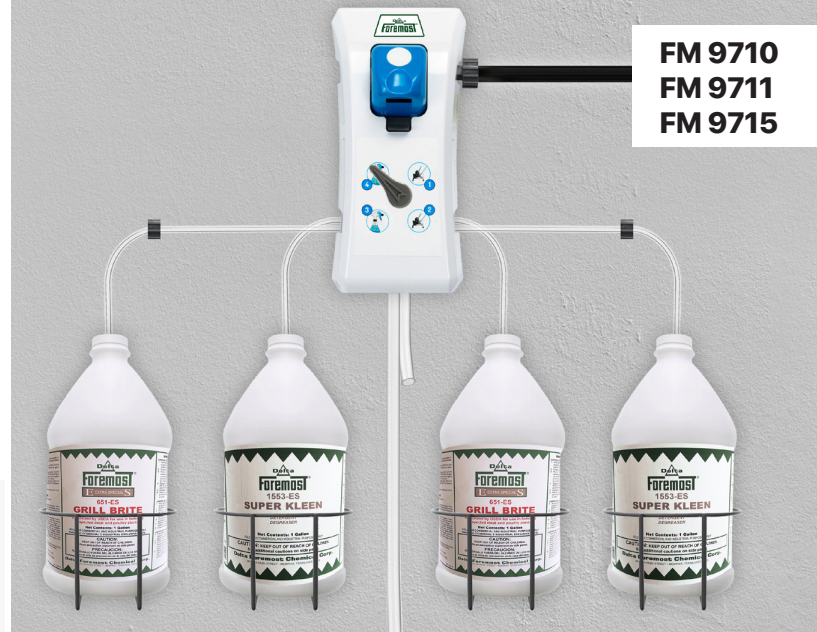

SPECIALTIES FOR MAINTENANCE
& SANITATION SINCE 1947

METER-MATICS

FM 9710 - FM 9711 - FM 9715

FM 9710 FAST FILL

- Fast fill 3.5 GPM flow rate
- Suitable for dispensing into buckets or other large reservoirs

FM 9711 SLOW FILL

- Slow fill 1.0 GPM flow rate
- Suitable for dispensing into small bottles
- Low flow rate lowers risk of spillage / overflow

FM 9715 METER-MATIC QDV

- Dispenses up to 4 products from 1 dispenser
- Comes standard with two fast fill / two slow fill
- Most economical choice for diluting numerous chemicals at multiple flow rates

CHEMICAL PROPORTIONING & DISPENSING SYSTEMS

Accurate, fool-proof, economical, convenient chemical control

Meter-Matic eliminates manual mixing which wastes chemicals and labor. The result is savings in time and money.

Corrosion-resistant components safe for acid and caustic solutions and water temperatures up to 160°F.

Set of color-coded metering tips offer a wide range of accurate water-to-product concentration ratios.

Non-electric function uses tap water and standard hose connections. No special plumbing required.

Daisy chain multiple units together for use with one water source, no extra equipment required

FM 8399 Wall-Mount Holder available for convenient mounting of gallon jugs near your Meter-Matic unit.



Contact Us



t 1.800.238.5150
f 1.901.375.3600



sales@deltaforemost.com
deltaforemost.com



3915 Air Park Street
Memphis, TN 38118